

## ZOMM SERIES


### ZOMM 124 / (XXX) / 1 / 33

(XXX)	20	200	201	202	203	204	205	206	207	208	209	210
Continuous Operating Voltage : a.c. (rms)	25	50	60	95	110	120	135	150	180	220	250	280
Energy per channel (Joules) (10/1000µs)	3.5	9	10	12	13	15	17	18	25	28	30	32
Max. Peak Clamping Volts at 5A (8/20µs)	90	-	-	-	-	-	-	-	-	-	-	-
Max. Peak Clamping Volts at 25A (8/20µs)	-	150	170	250	310	340	380	420	510	650	710	820

#### Characteristics:

No. of channels	33
50 Shot (4/20µs) Repetitive Duty	100A
Response Time	<10ns
Continuous Current per Channel	5A
Max. (8/20µ) Current per Channel	1000A
Leakage Current per Channel at Rated Voltage, d.c.	<50µA
Through Inductance	<10µH
Volts Drop	Negligible
Terminations	1mm Dia. H.D.H.C Tinned Copper
Bushes	PTFE
Earth Connection	To Base Plate

# ZOMM 124 / (XXX) / 1 / 33

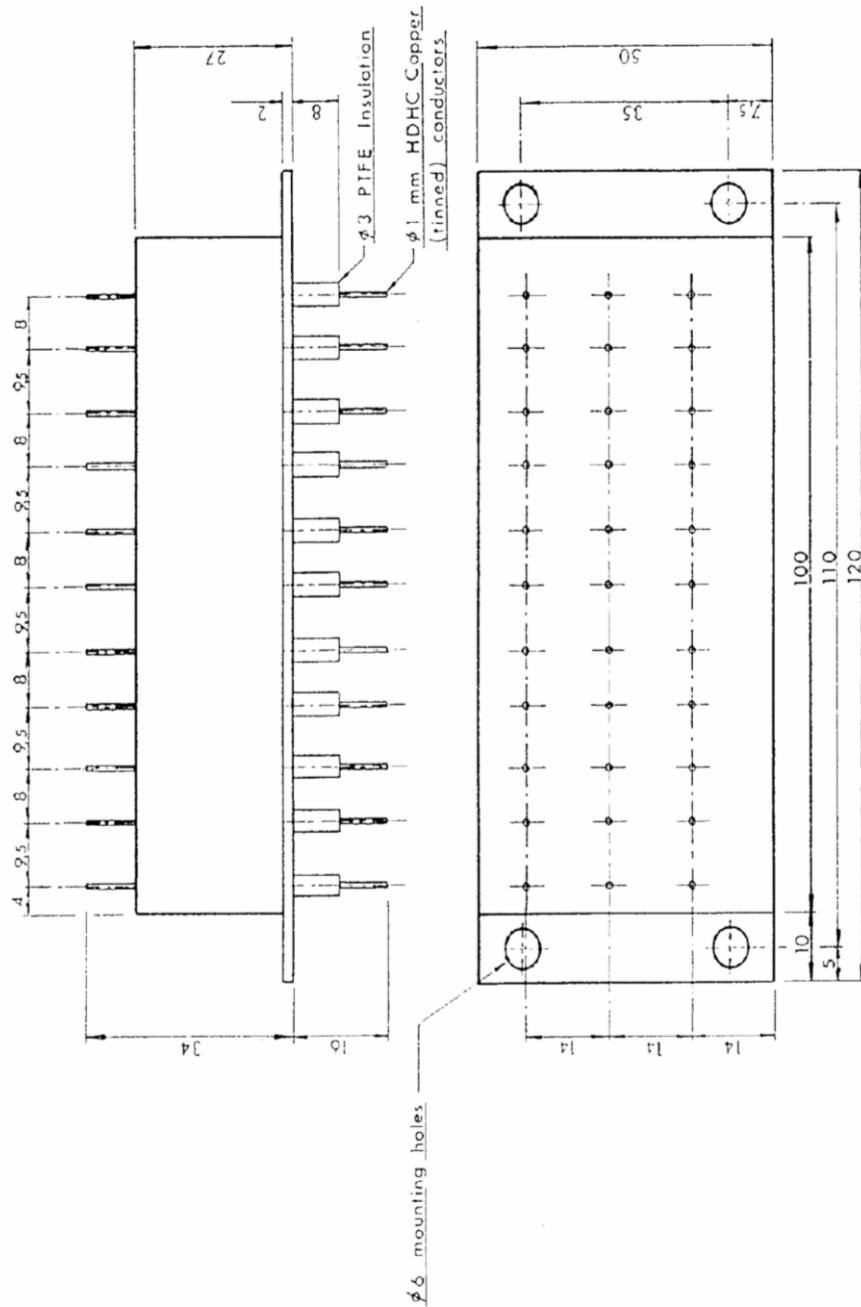

## Contacts

PD Devices Ltd  
Old Station Yard,  
South Brent,  
Devon,  
TQ10 9AL, UK.

Telephone : +44 01364 649248  
Facsimile : +44 01364 649250  
E-mail Enquiries : [enquiries@pddevices.co.uk](mailto:enquiries@pddevices.co.uk)  
Web Site : [www.pddevices.co.uk](http://www.pddevices.co.uk)

[enquiries@pddevices.co.uk](mailto:enquiries@pddevices.co.uk)

[www.pddevices.co.uk](http://www.pddevices.co.uk)

+44 (0)1364 649248